



**QUEEN'S
UNIVERSITY
BELFAST**

DiveRsity: An R package for the estimation and exploration of population genetics parameters and their associated errors

Keenan, K., McGinnity, P., Cross, T. F., Crozier, W. W., & Prodöhl, P. A. (2013). DiveRsity: An R package for the estimation and exploration of population genetics parameters and their associated errors. *Methods in Ecology and Evolution*, 4(8), 782-788. <https://doi.org/10.1111/2041-210X.12067>

Published in:
Methods in Ecology and Evolution

Document Version:
Peer reviewed version

Queen's University Belfast - Research Portal:
[Link to publication record in Queen's University Belfast Research Portal](#)

Publisher rights
© 2018 British Ecological Society. This work is made available online in accordance with the publisher's policies. Please refer to any applicable terms of use of the publisher.

General rights
Copyright for the publications made accessible via the Queen's University Belfast Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy
The Research Portal is Queen's institutional repository that provides access to Queen's research output. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact openaccess@qub.ac.uk.

**diverSity: An R package for the estimation and exploration of
population genetics parameters and their associated errors.**

Kevin Keenan¹, Philip McGinnity², Tom F. Cross², Walter W. Crozier³, Paulo A. Prodöhl^{1,*}

¹Institute for Global Food Security, School of Biological Science, Medical Biology
Centre, Queen's University, Belfast, BT9 7BL Northern Ireland

²Aquaculture & Fisheries Development Centre, School of Biological, Earth &
Environmental Sciences, University College Cork, Ireland

³Agri-Food and Biosciences Institute, Newforge Lane, Belfast, Northern Ireland

*Correspondence author: Paulo A. Prodöhl

Address: Institute for Global Food Security, School of Biological Science, Medical
Biology Centre, Queen's University, Belfast, BT9 7BL Northern Ireland

E-mail: p.prodohl@qub.ac.uk

Running title: diverSity package

Word count: 3102

Summary

1. We present a new R package, `diveRsity`, for the calculation of various diversity statistics, including common diversity partitioning statistics (θ , G_{ST}) and population differentiation statistics (D_{Jost} , G'_{ST} , χ^2 test for population heterogeneity), among others. The package calculates these estimators along with their respective bootstrapped confidence intervals for loci, sample population pairwise and global levels. Various plotting tools are also provided for a visual evaluation of estimated values, allowing users to critically assess the validity and significance of statistical tests from a biological perspective.
2. `diveRsity` has a set of unique features, which facilitate the use of an informed framework for assessing the validity of the use of traditional F-statistics for the inference of demography, with reference to specific marker types, particularly focusing on highly polymorphic microsatellite loci. However, the package can be readily used for other codominant marker types (e.g. allozymes, SNPs).
3. A detailed example of usage and descriptions of package capabilities are provided. The example demonstrates useful strategies for the exploration of data and interpretation of results generated by `diveRsity`. Additional on-line resources for the package are also described, including a GUI web app version intended for those with more limited experience using R for statistical analysis.

Introduction

As a consequence of the growing suite of statistical genetics tools, which are often tailored to particular marker types, the analyses of population genetic data is becoming an increasingly complex task (Excoffier & Heckel, 2006). For instance, F-statistics is a commonly used framework for the description of genetic diversity partitioning within and among populations. F-statistics estimators (e.g. θ , G_{ST}) suffer from an incompatibility when applied to highly polymorphic microsatellite markers (Hedrick, 1999; Jost, 2008), as a result of their negative dependence on within sub-population heterozygosity (Jost, 2008). Thus, for loci with many alleles (e.g. >10), within sub-population heterozygosity will invariably be high, and as a consequence, “traditional” F-statistics will have a theoretical maximum well below the expected $F_{ST} = 1$. Attempts have been made to overcome this issue, most notably by Hedrick (2005), with the development of G'_{ST} and more recently Jost (2008) with the development of D_{Jost} . However, much confusion still exists about what these “new” statistics should actually be used for (Gerlach *et al.*, 2010). It is not the purpose of this study to elaborate on such issues, however, interested readers are encouraged to see Jost (2008), Meirmans & Hedrick (2011) and Whitlock (2011) for useful reviews.

To add to the complexity, recent advances in molecular screening methodologies have greatly facilitated the ease with which genetic data can be generated. As a consequence, an increasing number of researchers, often with a limited background in statistical genetics analyses (Karl *et al.*, 2012), face the difficult task of analysing and interpreting such data. Thus, software tools that facilitate this task, by providing suitable frameworks to allow for informed analysis pipelines are essential. To this end, we present the software `diversity`. This R

package allows the estimation of various population genetic summary statistics including the two “traditional” F-statistics analogues; θ (Weir & Cockerham, 1984) and G_{ST} (Nei & Chesser, 1983), and the two “new” differentiation statistics; G'_{ST} (Hedrick, 2005) and D_{Jost} (Jost, 2008), as well as their unbiased/nearly unbiased estimators. Each statistic can be estimated for locus, global and sample pairwise comparisons. The package also provides functionality for the estimation of 95% confidence intervals at all relevant levels, through an integrated bootstrapping procedure. Uniquely to `diveRsity`, various plotting functions, designed to allow researchers to assess the validity of using their particular data set (or suite of marker loci) for the inference of geneflow using the F-statistics framework, are also provided, as well as visualisation tools for large pairwise matrices of genetic differentiation and parameter confidence intervals. Furthermore, `diveRsity` also provides a range of other statistical tools, which are commonly used in population genetic analyses pipelines but are rarely integrated into a single software package.

Another major advantage of using `diveRsity` is that it produces summary data structures, which are very close to publication-ready formats (e.g. figure 1). Given that the compilation of such summary data is time consuming and often involves the use of several software packages, `diveRsity` offers a valuable addition to the molecular ecologist’s statistical toolkit. Its implementation as an R package also makes `diveRsity` ideal for easy incorporation into analysis pipelines where batch processing of files/data is required, as is often the case in simulation based studies.

This package is intended to promote a more considered and simplified approach to frequentist population genetic structure analyses. Through the inclusion of `diversity`

partitioning statistics (e.g. θ & G_{ST}), differentiation statistics (e.g. G'_{ST} & D_{Jost}), as well as functionality to assess the behaviour of these statistics across loci and population samples, we hope to give researchers the necessary tools to make educated decisions about the statistical and biological validity of their analyses with relative ease. Following this rationale, we have also opted to omit the option for users to carry out p -value null hypothesis testing in relation to F-statistics and population sample differentiation estimators. This decision was taken given the lack of meaningful information conveyed through the use of p -values in this context, as well as the many misconceptions that exist regarding the biological interpretation of p -values in relation to these statistics (Wagenmakers, 2007). We have instead provided functions to allow users to estimate 95% confidence intervals (calculated as the 2.5% and 97.5% quantiles of a bootstrap distribution), for a range of statistical estimators calculated by the package, thus, leading to more reliable conclusions about the biological significance of trends in the data, (see figure 2 in du Prel *et al.*, 2009), leaving less room for erroneous interpretation.

Description

`diveRsity` is a package written for use in R (R Development Core Team, 2011). It is primarily designed for the estimation, exploration and validation of genetic differentiation/structure indices. The package aims to consolidate under the same work environment, many of the most popular population genetic statistics such as those mentioned above, in order to provide researchers with a simplified way in which to calculate and compare these statistics. This strategy is particularly useful for the identification of polymorphism based biases mentioned previously. This information can be subsequently used, along with additional exploration tools

implemented in the package, to make informed decisions about which statistical measures or molecular markers can be appropriately applied to address a particular question.

`diveRsity` also calculates a plethora of other statistics and has various other population genetics applications. Table 1 provides a list of functions along with brief descriptions of their specific purposes. The package accepts raw genotype data for any group of co-dominant molecular markers in the *genepop* file format (Raymond & Rousset, 1995). There is no limit to the size of the accepted input file other than the amount of random access memory (RAM) available to users. In addition to providing users with the ability to efficiently estimate an array of population genetic statistics, `diveRsity` is also particularly flexible in terms of return result formats (e.g. text files, excel workbooks and native R objects such as matrices and data frames). This flexibility facilitates subsequent downstream analysis (e.g. incorporation into simulation or Approximate Bayesian Computation (ABC) pipelines as the summary statistic calculation software). A list of specific output formats is also summarised in Table 1.

Dependencies and suggested packages

In general, `diveRsity` can be used with a standard R installation and two additional extension packages (`plotrix` and `shiny`). The functions `divPart`, `inCalc`, `chiCalc` and `readGenepop`, `divBasic`, `bigDivPart` and `divRatio`, (i.e. the major analytical functions), can all operate independently of non-standard packages. The only disadvantages of this approach are slower execution times (i.e. parallel computation is not available), and a limited number of formats available for returned results. To fully capitalise on the additional

features of `diveRsity` (listed in Table 1), the installation of all suggested packages is recommended. Details of these packages are given in Table 2.

Comparisons with other software

The main motivation behind the development of `diveRsity` was to provide a cross-platform software, which allows comprehensive and fast frequentist analysis of co-dominant molecular data, while maintaining usability and convenient result formats. On each of these aims, `diveRsity` performs comparatively better in relation to other similar software.

Comprehensiveness

When compared to other software which estimate similar statistics, `diveRsity` generally provides a more comprehensive range of parameter calculation options. In terms of the total number of available population genetics statistics, with the possible exception of the Mac OS X only program, `GenoDive` (Meirmans & Van Tienderen, 2004), `diveRsity` estimates many more than `DEMEtics` (Gerlach *et al.*, 2010), `SMOGD` (Crawford, 2010), `mmod` (Winter, 2012), `hierfstat` (Goudet, 2004) or `SPADE` (Chao & Shen, 2003).

Focusing only on diversity partitioning/differentiation statistics, `diveRsity` overlaps in its calculation of D_{Jost} with all of the above mentioned software. However, `diveRsity` is the only package that allows the estimation of 95% confidence intervals, globally (i.e. for all samples and loci), per locus (i.e. over all samples) and for all pairwise sample comparisons (i.e. over all loci per population pair). `SMOGD`, for example, which is perhaps the most popular

of these applications (with over 212 citations according to Google scholar), calculates bootstrapped confidence intervals for D_{Jost} at the locus level across all population samples, but does not provide this estimation for either the global or pairwise levels.

Despite the focus of this study on diversity partition/differentiation statistics, `diveRsity` also estimates many other useful population genetics statistics. These include, χ^2 tests of Hardy-Weinberg equilibrium (HWE), Allelic richness (A_r), Chi-square tests for sample homogeneity, 'Yardstick' diversity standardised ratios (Skrbinšek *et al.*, 2012) and locus informativeness for the inference of ancestry (Rosenberg *et al.*, 2003). Contrary to other similar programs, `diveRsity` also provides various exploratory plotting tools, which can be very useful for the identification of meaningful trends within results with minimal effort (e.g. Example 1). Typically, this task would involve the compilation of output results from various programs and subsequent visualisation in an independent software package (e.g. Microsoft Excel). A full description of `diveRsity`'s functionality can be found by typing either of the following commands into the R console:

```
# diveRsity must be installed

# 1) package help pages
help(package = "diveRsity")

# 2) package user manual
vignette("diveRsity")
```

Speed

Given the different analytical focuses of distinct softwares, performance comparisons in terms of speed are not straightforward. For example, while in one software a given test statistic might be estimated using a maximum likelihood procedure, in another, a more computational intensive procedure (e.g. bootstrapping) may be used. For the purposes of this study, comparisons were restricted to instances where distinct softwares implemented similar computational processes to calculate a similar suit of statistical parameters. Based on these criteria, only two truly comparable speed comparisons were possible between `diveRsity` and any of the above listed software.

The first is a comparison of locus confidence interval estimation using bootstrapping with SMOGD. The reproducible code used to run `diveRsity` is:

```
system.time({  
  # load diveRsity  
  library("diveRsity")  
  # load Test_data  
  data(Test_data)  
  
  # run the analysis  
  x <- divPart(infile = Test_data, outfile = NULL, gp = 3,  
               pairwise = TRUE, WC_Fst = FALSE, bs_locus = TRUE,  
               bs_pairwise = FALSE, bootstraps = 1000, plot = FALSE,  
               parallel = TRUE)  
})
```

When running SMOGD on the example data set `Test_data` (see Keenan *et al.*, in press for details on these data), with bootstraps set to 1000, the time taken to return results to the web browser is 2 min 34.1 sec, while `diveRsity` takes only 1 min 17.3 sec to carry out the same calculations on a laptop with an Intel Core i5-2435 CPU @ 2.49GHz. It is also relevant to note that `diveRsity`'s performance can be significantly increased with the use of additional CPUs.

The second comparison involves the calculation of diversity partitioning statistics per locus for large data sets (e.g. RAD-seq derived SNP genotypes). This comparison was carried out between the `diveRsity` function `bigDivPart` and the `hierfstat` function `basic.stats`. For this test, a simulated data set of 268 individuals across four population samples genotyped for 55,200 bi-allelic SNP loci was used. To complete the entire analysis, `diveRsity` took 3 min 20.1 sec, while `hierfstat` took 6 min 44.8 sec, using the same laptop as described above. Such speed differences become even more important with the increasing rate at which large arrays of loci can be genotyped for large numbers of individuals.

Usability & convenience

Similar to other R packages, in order to fully benefit from all features built into `diveRsity`, a reasonable level of expertise in R is required. However, `diveRsity` has been designed so that even R beginners or those with very limited expertise, can easily carry out comprehensive analysis of their data, including results being written to file, in many cases with a single command line. This is in contrast to other packages such as `mmod` and `hierfstat` which invariably require users to export their own result from the R environment, as well as execute

more functions to calculate fewer parameters than `diveRsity`. An example of the convenient results formats returned by `diveRsity` is shown in figure 1.

In keeping with the focus on ease of use, `diveRsity` also includes a web application which provides a browser based user interface for the estimation of the most popular statistics implemented in the command line version of the package. This application was built using the framework provided by the R package, `shiny` (RStudio & Inc., 2012) and provides users with a range of benefits including an easy to use interface and downloadable result files. The browser user interface also allows users to run their analyses on a remote server, thus, local system resources are not consumed. The application can be accessed at:

<http://glimmer.rstudio.com/kkeenandiveRsity-online/>

Users can also run this application locally by executing the following command in the R console:

```
# after loading diveRsity
divOnline()
```

Despite an emphasis on simplicity, `diveRsity` still retains all of the functionality and flexibility provided by the R environment (i.e. all results are returned to the current session workspace). Thus, users with more experience, can easily pipe results from their analyses into downstream custom analyses (e.g. ABC).

Accessing the package

The `diveRsity` package is hosted on the Comprehensive R Archive Network (CRAN), and can be downloaded using the `install.packages` function in R. Simply type the following command into the R console:

```
install.packages("diveRsity", dependencies = TRUE)
```

Providing the user has a working internet connection, and following the selection of a suitable CRAN repository mirror, the package will download and install automatically.

Ongoing development of `diveRsity` can also be tracked at:

<http://diversityinlife.weebly.com/software.html>

This web page contains the latest developmental versions of the package as well as an update log.

Examples

As a demonstration of some of the envisaged applications of `diveRsity`, two reproducible examples are provided below. These examples assume that the `diveRsity`, `shiny`, `doParallel`, `sendplot` and `plotrix` packages have been installed as well as their dependencies. For additional examples, users are encouraged to read the package manual.

Example 1. Using visualisation tools to investigate large genetic differentiation matrices

Pairwise genetic differentiation is an important parameter in the assessment of relationships among populations within a geographical context. To date, the true potential of pairwise genetic differentiation statistics has not been fully realised, owing mainly to difficulties in identifying meaningful trends in often very large numbers of population comparisons.

However, by using both the `divPart` and `difPlot` functions, `diveRsity` allows users to visualise large pairwise matrices of genetic differentiation, making the identification of particularly differentiated population samples relatively straightforward. This procedure is demonstrated below.

Load `diveRsity` into the current R session:

```
# Load the diveRsity package  
require("diveRsity")
```

In this example the `Big_data` data set (distributed with `diveRsity`), will be used. The data were simulated under a hierarchical island model (i.e. five island groups with 10 sub-populations each allowing high geneflow within island groups and low geneflow among island groups), using the software EASYPOP v1.7 (Balloux, 2001). Population samples within the `Big_data` data file were arranged in order of geographical proximity for the purpose of demonstrating how `diveRsity` can be used to identify broad-scale geographical trends from genetic data.

313

```
314 # Load 'Big_data'
```

```
315 data(Big_data, package = "diveRsity")
```

316

317 The `divPart` function is first used to calculate the required pairwise statistics matrices. In

318 this example the argument `parallel` will be set to `TRUE` as a large number of comparisons

319 have to be computed (i.e. $\frac{1}{2}N \times [N - 1] = 1225$ for $N = 50$).

320

```
321 # Assign the results to the variable 'pwStats'
```

```
322 # (i.e. pw = pairwise)
```

```
323 pwStats <- divPart(infile = Big_data, outfile = "Big_results",
```

```
324                      gp = 2, WC_Fst = TRUE, bs_locus = FALSE,
```

```
325                      bs_pairwise = FALSE, bootstraps = 0,
```

```
326                      Plot = FALSE, parallel = TRUE)
```

327

328 The resulting R object, `pwStats` contains the required pairwise statistics which can be passed

329 to the function `difPlot` for visualisation.

330

```
331 difPlot(x = pwStats, outfile = "Big_results",
```

```
332         interactive = TRUE)
```

333

334 This command will write four `.png` files (one for each estimated statistic), and four `.html` files

335 to the folder `Big_results` under the current R working directory. An example of the

336 functionality of the `.html` tool-tips is given in figure 2. From this figure, it is clear that the data

337 are represented by five distinct genetic groups, which correlates with the simulation

conditions described above. There are clearly high levels of differentiation among island groups (light blue/white) and low levels of differentiation within island groups (dark blue). This graphical representation perfectly relays what is known to be genetically/evolutionarily true (though natural population systems will rarely be so ideal). Figure 2 also illustrates the ability to rapidly identify population pairs of interest by simply positioning the mouse pointer over a particular comparison square/pixel. In this example the pairwise comparison between populations 18 vs 23, ($G_{ST} = 0.8883$, $\theta = 0.9408$, $G'_{ST} = 0.9927$ and $D_{Jost} = 0.8802$), indicates that these two populations are highly differentiated from one another.

Example 2. Assessing polymorphism bias in diversity partitioning estimators

As discussed above, diversity partitioning statistics such as G_{ST} and θ are negatively dependent on within sub-population heterozygosity. Where this negative dependence is present (e.g. when using highly polymorphic microsatellites), it is important to ensure that inferences made from calculated values do not violate important assumptions. Using the functions `divPart`, `readGenepop` and `corPlot`, it is possible to carry out an *ad hoc* assessment of polymorphism bias in diversity statistics, thus allowing users to make informed decisions about whether to proceed with inference of demographic processes for example. A reproducible example is given below:

```
# Load the diveRsity package
require("diveRsity")
```


362 Next an example data set (`Test_data`) provided with `diveRsity` should be loaded into the
363 R session.

364

```
365 # Load 'Test_data'
366 data(Test_data, package = "diveRsity")
```

367

368 Initially `Test_data` is analysed by the function `divPart` to calculate locus θ , G_{ST} , G'_{ST}
369 and D_{Jost} estimators.

370

```
371 # Assign the results to the variable 'difStats'
372 difStats <- divPart(infile = Test_data, outfile = "Test",
373                    gp = 3, WC_Fst = TRUE, bs_locus = TRUE,
374                    bs_pairwise = FALSE, bootstraps = 1000,
375                    plot = TRUE, parallel = TRUE)
```

376

377 Next `Test_data` is analysed by `readGenepop` to count the total number of alleles per locus.

378

```
379 # Assign the result to the variable 'numAlleles'
380 numAlleles <- readGenepop(infile = Test_data, gp = 3,
381                          bootstrap = FALSE)
```

382

383 The package has now generated two results objects in the R environment: `difStats` and
384 `numAlleles`. These objects can be passed to the function `corPlot`.

385

```
386 corPlot(x = numAlleles, y = difStats)
```

387

Figure 3 provides an example of the output from this analysis. As can be seen in this example, both θ and G_{ST} are negatively correlated with the number of alleles per locus, whilst G'_{ST} and D_{Jost} are strongly positively correlated. This discordance is indicative of a case where the mutation rate is likely to obscure past demographic processes (e.g. geneflow), thus such a data set is unsuitable for addressing such questions.

Users executing the above code will also see a range of other graphical outputs in a folder named "Test" within their working directory. These plots allows users to assess the variability of parameter estimation for individual loci, which can in turn be incorporated into decisions about 'misbehaving' loci for example.

Acknowledgements

The authors would like to thank J.J. Magee, M.S.P Ravinet, J. Coughlan and C. Johnston for testing the `diversity` package and R. Hynes for proofreading the manuscript. We would also like to express our gratitude to MEE executive editor Dr. Robert B. O'Hara and two anonymous reviewers, whose comments greatly improved the manuscript and the `diversity` package. K.K. was supported by a PhD studentship from the Beaufort Marine Research Award in Fish Population Genetics funded by the Irish Government under the Sea Change programme. P.A.P, T.F.C, W.W.C and P.McG were also supported by this award.

References

Balloux, F. (2001) EASYPOP (version 1.7): a computer program for population genetics simulations. *Journal of Heredity*, **92**, 301–302.

412

413 Chao, A. & Shen, T.J. (2003) Program SPADE (species prediction and diversity estimation).

414 *published at <http://chao.stat.nthu.edu.tw>. [accessed 27 March 2013]*

415

416 Crawford, N.G. (2010) SMOGD: software for the measurement of genetic diversity.

417 *Molecular Ecology Resources*, **10**, 556–557.

418

419 Dragulescu A.A. (2012) *xlsx: Read, write, format Excel 2007 and Excel 97/2000/XP/2003 files.*

420 <http://cran.r-project.org/web/packages/xlsx/> [accessed 27 March 2013]

421

422 du Prel, J.-B., Hommel, G., Röhrig B. & Blettner M. (2009) Confidence interval or p-value?.

423 *Deutsches Ärzteblatt international*, **106**, 335–339.

424

425 Excoffier, L. & Heckel, G. (2006) Computer programs for population genetics data analysis: a

426 survival guide. *Nature Reviews. Genetics*, **7**, 745–58.

427

428 Gaile D.P., Shepherd L.A., Sucheston L., Bruno, A. & Manly K.F.(2012) *sendplot: Tool for*

429 *sending interactive plots with tool-tip content.* <http://cran.r->

430 [project.org/web/packages/sendplot/](http://cran.r-project.org/web/packages/sendplot/) [accessed 27 March 2013]

431

432 Gerlach, G., Jueterbock, A., Kraemer, P., Deppermann, J. & Harmand, P. (2010) Calculations

433 of population differentiation based on G_{ST} and D : forget G_{ST} but not all of statistics!.

434 *Molecular Ecology*, **19**, 3845–3852.

435

436 Goudet, J. (2004) hierfstat, a package for R to compute and test hierarchical F-statistics.
437 *Molecular Ecology Notes*, **5**, 184–186.
438
439 Hedrick, P.W. (2005) A standardized genetic differentiation measure. *Evolution*, **59**, 1633–
440 1638.
441
442 Hedrick, P.W. (1999) Highly variable loci and their interpretation in evolution and
443 conservation. *Evolution*, **53**, 313–318.
444
445 Jost, L. (2008) G_{ST} and its relatives do not measure differentiation. *Molecular Ecology*, **17**,
446 4015–4026.
447
448 Karl S.A., Toonen R.J., Grant W.S. & Bowen B.W. (2012) Common misconceptions in
449 molecular ecology: echoes of the modern synthesis. *Molecular Ecology*, **21**, 4171–4189.
450
451 Keenan, K., Bradley, C.R., Magee, J.J., Hynes, R.A., Kennedy, R.J., Crozier, W.W., Poole, R.,
452 Cross, T.F., McGinnity, P. & Prodöhl, P.A. (in press) Beaufort Trout MicroPlex: A high
453 throughput multiplex platform comprising 38 informative microsatellite loci for use in
454 brown trout and sea trout (*Salmo trutta* L.) genetics studies. *Journal of Fish Biology* (in
455 press).
456
457 Lemon, J. (2006) Plotrix: a package in the red light district of R. *R News*, **6**, 8–12.
458
459 Meirmans, P.G. & Van Tienderen, P.H. (2004) GENOTYPE and GENODIVE: two programs for

the analysis of genetic diversity of asexual organisms. *Molecular Ecology Notes*, **4**, 792–794.

Meirmans, P.G. & Hedrick, P.W. (2011) Assessing population structure: F_{ST} and related measures. *Molecular Ecology Resources*, **11**, 5–18.

Nei, M. & Chesser, R.K. (1983) Estimation of fixation indices and gene diversities. *Annals of Human Genetics*, **47**, 253–259.

R Development Core Team (2012) R: A Language and Environment for Statistical Computing. R Foundation for Statistical Computing, Vienna. <http://www.R-project.org> [accessed 27 March 2013]

Raymond, M. & Rousset, F. (1995) GENEPOP (version 1.2): population genetics software for exact tests and ecumenicism. *Journal of Heredity*, **86**, 248.

Revolution Analytics (2012a) *doParallel: Foreach parallel adaptor for the parallel package*. <http://cran.r-project.org/web/packages/doParallel/> [accessed 27 March 2013]

Revolution Analytics (2012b) *foreach: Foreach looping construct for R*. <http://cran.r-project.org/web/packages/foreach/> [accessed 27 March 2013]

Revolution Analytics (2012c) *iterators: Iterator construct for R*. <http://cran.r-project.org/web/packages/iterators/> [accessed 27 March 2013]

484 Rosenberg, N.A., Li, L.M., Ward, R. & Pritchard, J.K. (2003) Informativeness of genetic
485 markers for inference of ancestry. *The American Journal of Human Genetics*, **73**, 1402–1422.
486

487 RStudio and Inc. (2012) *shiny: Web Application Framework for R*. [http://cran.r-](http://cran.r-project.org/web/packages/shiny/)
488 [project.org/web/packages/shiny/](http://cran.r-project.org/web/packages/shiny/) [accessed 27 March 2013]
489

490 Skrbinišek, T., Jelenčič, M., Waits, L.P., Potočnik, H., Kos, I. & Trontelj, P. (2012) Using a
491 reference population yardstick to calibrate and compare genetic diversity reported in
492 different studies: an example from the brown bear. *Heredity*, **109**, 299–305.
493

494 Wagenmakers, E.J. (2007) A practical solution to the pervasive problems of p -values.
495 *Psychonomic Bulletin & Review*, **14**, 779–804.
496

497 Weir, B.S. & Cockerham, C.C. (1984) Estimating F-statistics for the analysis of population
498 structure. *Evolution*, **38**, 1358–1370.
499

500 Whitlock, M.C. (2011) G'_{ST} and D do not replace F_{ST} . *Molecular Ecology*, **20**, 1083–91.
501

502 Winter, D.J. (2012) mmod: an R library for the calculation of population differentiation
503 statistics. *Molecular Ecology Resources*, **12**, 1158–1160.
504

505 **Table 1:** Functions of the diveRsity package
506

Function	Returned objects	Description
<code>chiCalc</code>	R character matrix, optional <code>.txt</code> file	Test for genetic heterogeneity between population samples using the chi-square distribution. The function provides the unique option to disregard alleles of very low frequencies using the argument <code>minFreq</code> .
<code>corPlot</code>	R graphics plot (not automatically written to file)	Correlation plotting of diversity statistics against the number of alleles per locus. The function is intended to aid in the assessment of marker suitability for the estimation of geneflow.
<code>divPart</code>	<code>.html</code> , <code>.png</code> , <code>.txt</code> , <code>.xlsx</code> , R data object	A function for the calculation of diversity partition statistics and their associated variance through bootstrapping. Global, locus and pairwise levels are addressed.
<code>divOnline</code>	NA	This function launches the web app version of <code>divPart</code> . Local resources are used when running analyses. The system default web browser is used to host the application
<code>difPlot</code>	<code>.html</code> , <code>.png</code>	Provides visualization and exploration of pairwise genetic differentiation. The function is particularly useful for data sets containing a large number of population samples.
<code>inCalc</code>	<code>.png</code> , <code>.txt</code> , <code>.xlsx</code> , R data object	A function for the calculation of allele and locus informativeness for the inference of ancestry. Bootstrap confidence intervals are also calculated.
<code>readGenepop</code>	R data object	A general purpose function designed to calculate basic descriptive parameters from raw genetic data. This function is intended as a tool for developers of population genetics software in R.
<code>divRatio</code>	R data object, <code>.txt</code> , or <code>.xlsx</code>	This function calculates the diversity ratio statistics presented in (Skrbinšek <i>et al.</i> , 2012).
<code>bigDivPart</code>	R data object, <code>.txt</code> , or <code>.xlsx</code>	This function is identical to <code>divPart</code> except for its lack of bootstrapping functionality. It is coded in a specific way to allow the sequential analysis of large number of markers (e.g. <100,000).
<code>fstOnly</code>	R data object, <code>.txt</code> , or <code>.xlsx</code>	This function calculates only Weir & Cockerham's 1984 F-statistics. The function is slightly faster than <code>divPart</code> which also calculates where statistics.
<code>divBasic</code>	R data object, <code>.txt</code> , or <code>.xlsx</code>	This function calculates basic population bases statistics such as Allelic richness, Hardy-Weinberg equilibrium and locus expected and observed heterozygosies.

508 **Table 2:** Additional packages used by the diveRsity package, along with their
 509 implementations.

Package	Implementation	Status	Citation
Xlsx	Used in <code>divPart</code> and <code>inCalc</code> to return multi-sheet .x/sx workbooks	Suggested	(Dragulescu, 2012)
sendplot	Used in <code>divPart</code> , <code>divPlot</code> and <code>inCalc</code> to produce tool tips for data visualisation	Suggested	(Gaile <i>et al.</i> , 2012)
doParallel	Used in <code>divPart</code> and <code>inCalc</code> for parallel computation	Suggested	(Revolution Analytics, 2012a)
parallel	Used in <code>divPart</code> and <code>inCalc</code> for parallel computation	Suggested	(R Development Core Team, 2012)
foreach	Used in <code>divPart</code> and <code>inCalc</code> for parallel computation	Suggested	(Revolution Analytics, 2012b)
iterators	Used in <code>divPart</code> and <code>inCalc</code> for parallel computation	Suggested	(Revolution Analytics, 2012c)
plotrix	Used in <code>divPlot</code> for additional plotting features	Dependency	(Lemon, 2006)
shiny	Used to build and run the web app version of the <code>divPart</code> function	Dependency	(RStudio & Inc., 2012)

510

511

512 Figures

pop1	Locus1	Locus2	Locus3	Locus4	Locus5	Overall
N	46	47	47	47	45	46.4
A	4	3	11	6	19	43
%	80	100	78.57	75	73.08	81.33
Ar	3.57	2.92	10.36	5.41	17.12	7.88
Ho	0.67	0.57	0.87	0.64	0.76	0.7
He	0.66	0.53	0.83	0.67	0.92	0.72
HWE	0.6321	0.794	0.7286	0.8701	0.012	0.1064
pop2	Locus1	Locus2	Locus3	Locus4	Locus5	Overall
N	40	42	42	42	42	41.6
A	5	2	13	7	20	47
%	100	66.67	92.86	87.5	76.92	84.79
Ar	4.86	2	10.84	5.89	17.27	8.17
Ho	0.65	0.48	0.74	0.52	0.9	0.66
He	0.66	0.5	0.79	0.71	0.92	0.72
HWE	0.534	0.7642	0.9999	0.5327	0.9249	0.9988
pop3	Locus1	Locus2	Locus3	Locus4	Locus5	Overall
N	41	41	41	40	39	40.4
A	5	2	10	4	14	35
%	100	66.67	71.43	50	53.85	68.39
Ar	4.62	2	8.82	4	12.41	6.37
Ho	0.73	0.39	0.71	0.7	0.87	0.68
He	0.71	0.5	0.8	0.7	0.87	0.71
HWE	0	0.1604	0.9874	0.9841	0.9929	0.8389

513

514 **Figure 1.** A screen-shot of the results output format from the function `divBasic`. This table
515 format is commonly seen in journal articles when presenting basic population genetic
516 parameters. However, the parameters often have to be calculated in separate software
517 packages and tabulated by authors. `diveRsity` aims to reduce this requirement for authors.
518 The parameter calculated in this table are; N = Number of individuals per population sample
519 genotyped per locus, A = Total number of alleles observed per population sample per locus,
520 $\%$ = Percentage of total alleles observed across population samples per population sample

per locus, A_r = Allelic richness per locus, H_o = observed heterozygosity per locus, H_e = expected heterozygosity per locus, HWE = Hardy-Weinberg Equilibrium p -value from the χ^2 goodness-of-fit tests per locus.

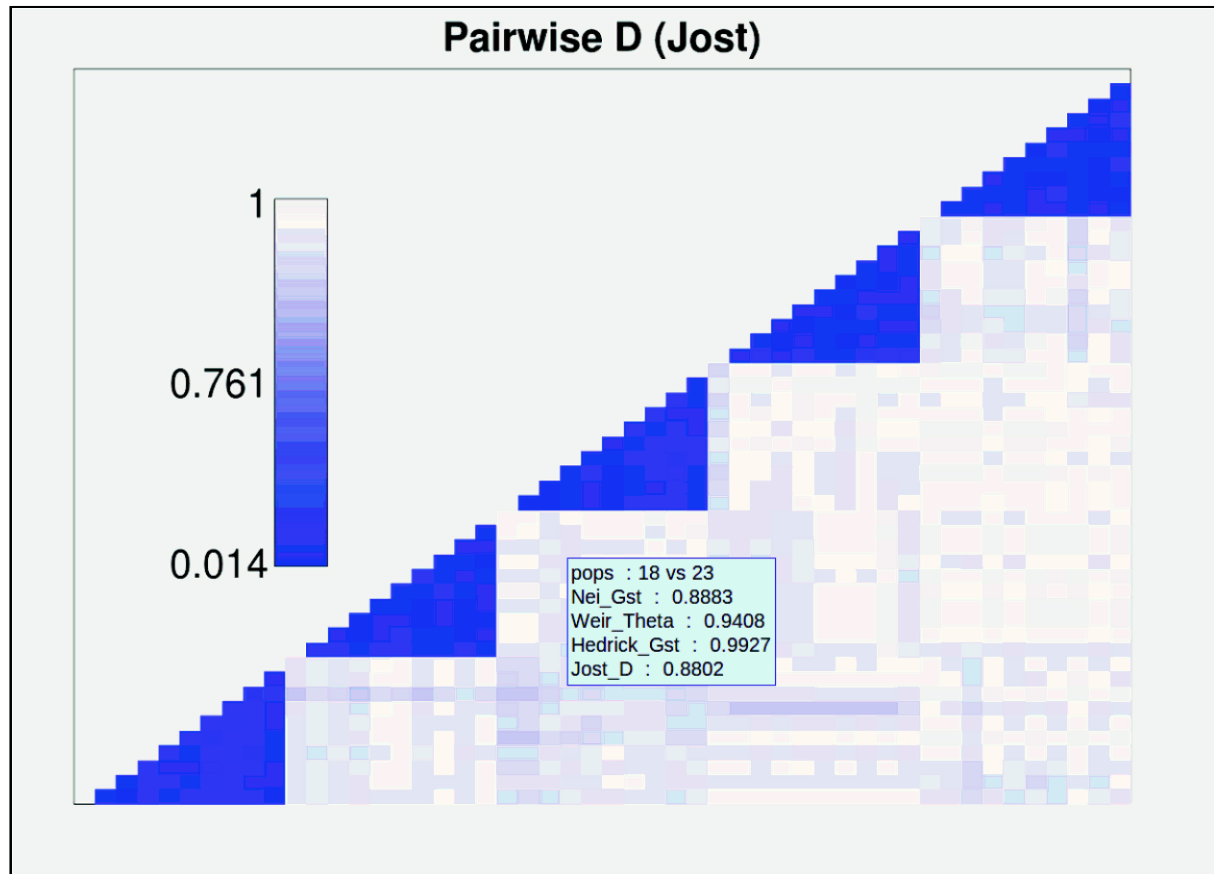


Figure 2. Visualisation of pairwise D_{Jost} (estimator), for $N = 50$ populations. Total pairwise comparisons = 1225. This figure is returned from the `difPlot` function, which will plot diversity partitioning and differentiation estimators returned by `divPart`. Regions of dark blue represent low genetic differentiation, while light blue/white represents high differentiation. The text box caption is an example of the tool-tip information associated with each pairwise population comparison.

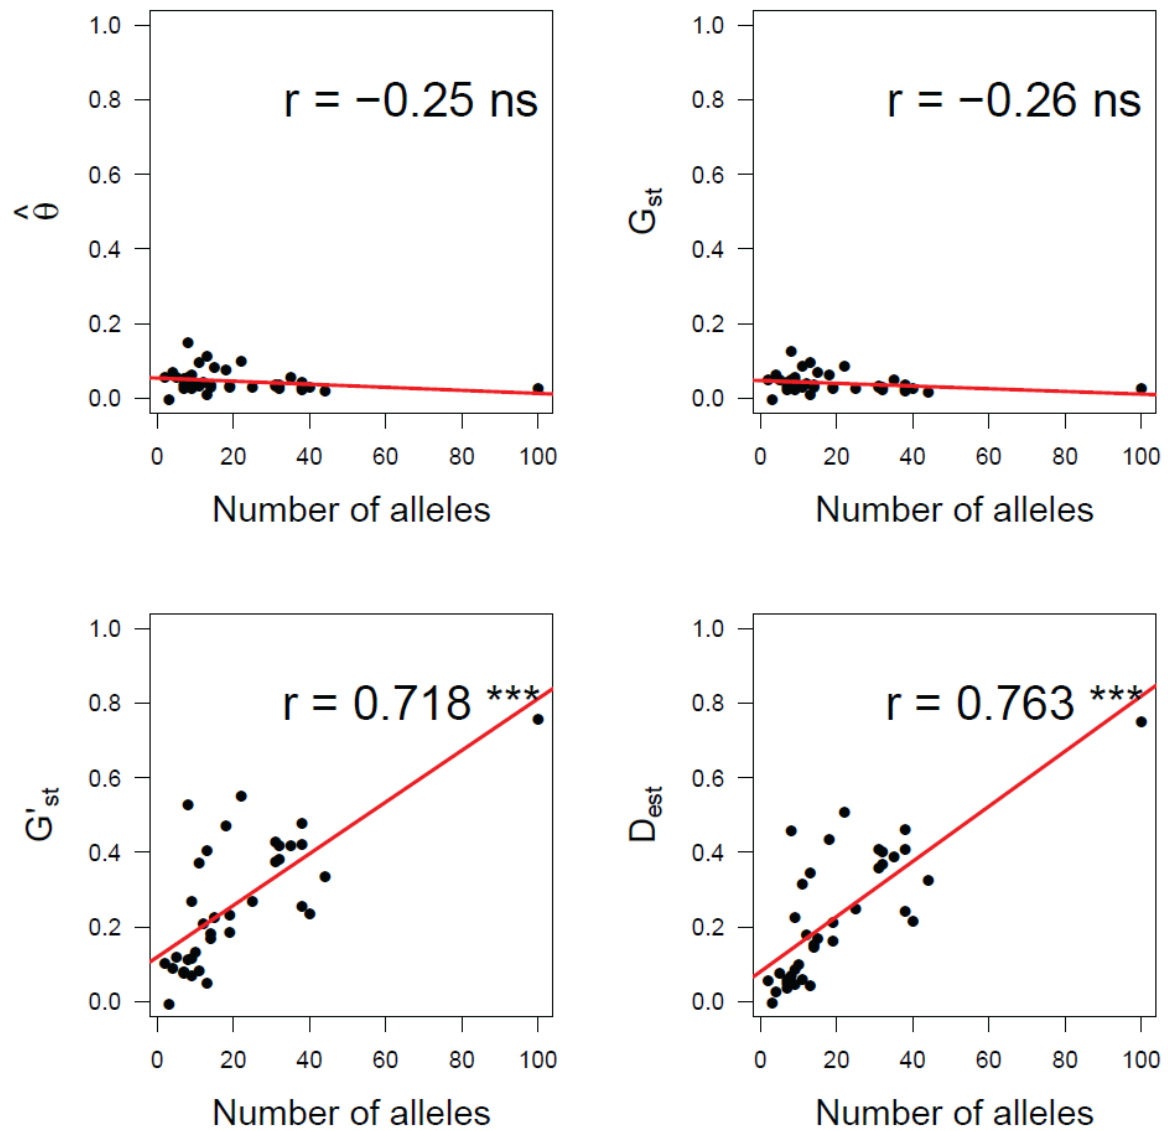


Figure 3. Correlation assessment of locus estimators $\hat{\theta}$, G_{ST} , G'_{ST} , and D_{est} (D_{Jost} unbiased estimator), with locus polymorphism (total number of alleles), returned from the `corPlot` function. Red lines represent the line of best fit and r values are Pearson product moment correlation coefficients.